

SIEMENS



SINAMICS G120C

Small but packed with functions

[siemens.com/sinamics-g120c](https://www.siemens.com/sinamics-g120c)

The compact inverter for an uncountable number of applications

The SINAMICS G120C defines new standards in its class regarding size, fast commissioning, extremely simple operator control, high level of service-friendliness and highly integrated functionality.

It is predestined for machinery construction and sales through distribution channels and covers the requirements of many applications, e.g. for conveyor belts, mixers, extruders, pumps, fans, compressors and basic handling machines.




SINAMICS offers a whole raft of advantages:

- Standard operator control and functionality as a result of the common hardware and software platform
- Both low-voltage as well as medium voltage
- A common engineering approach for all drives
 - SIZER for engineering
 - STARTER for parameterization and commissioning
- High degree of flexibility and combinability
- Identical options
- Minimized training costs

Decisive advantages for machinery construction

SINAMICS G120C was specifically designed for OEMs who require a cost-effective, space-saving inverter that is simple to operate and has a broad range of functions. This drive unit is especially compact with a high power density and sets itself apart as a result of its fast installation and commissioning, user-friendly connections and simple commissioning tools. Already integrated: Safety functions (STO via terminal/with PROFIsafe), drive networking via standard fieldbus systems as well as a card slot for cloning parameter sets.

With three frame sizes, SINAMICS G120C covers a range of





power ratings from 0.55 kW up to 18.5 kW. To increase the energy efficiency, the inverter is equipped with vector control to achieve optimum energy efficiency and/or has automatic flux reduction. The device is an integral component of Totally Integrated Automation and

has PROFINET, PROFIBUS DP, USS/Modbus RTU as well as CANopen communication interfaces. Operation/commissioning is quickly and simply realized with a PC via USB or using the BOP-2 (Basic Operator Panel) or IOP (Intelligent Operator Panel).

SINAMICS G120C is part of the SINAMICS family

SINAMICS G120C is a member of the seamless and integrated family of SINAMICS drives – the first choice for innovative drive solutions that are fit for the future. SINAMICS offers the optimum drive for each and every application. As a consequence, all of the drives can be configured, parameterized, commissioned and operated in a standard fashion.

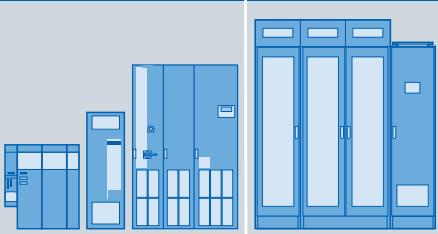Low voltage	Medium voltage	
		
SINAMICS G 0.12–2700 kW	SINAMICS S 0.12–4500 kW	SINAMICS GM/SM/GL 0.8–120 MW



Highlights at a glance

Mechanical design

- Compact
- Simple commissioning and maintenance
- Side-by-side mounting without derating
- Pluggable terminals

Electronics

- Integrated braking chopper
- STO safety function
- IOP, BOP-2 and USB interface
- Interchangeable memory card (SD)
- Electrically isolated inputs


Communication

- PROFINET, PROFIBUS DP, CANopen, USS/Modbus RTU
- Integral component of Totally Integrated Automation

SINAMICS G120C – advantages

	G120C features	Your benefits
Small and rugged		
	<ul style="list-style-type: none"> • High power density, low envelope dimensions • Several devices can be mounted directly next to one another • Coated modules • Operation up to an ambient temperature of 60 °C • Simple installation in the smallest space 	<ul style="list-style-type: none"> • Low space requirement • Long service life, high reliability • Can be used in small control cabinets, close to the machine
Operator friendliness		
	<ul style="list-style-type: none"> • Optimized parameter set • Optimized commissioning • Getting-Started document • BOP-2 and IOP operator panels can be used • Integrated USB port 	<ul style="list-style-type: none"> • Simple and fast software parameterization • Simple operability during commissioning and in operation • Minimized training costs, utilization of already existing SINAMICS know-how • High degree of service friendliness
Installation and maintenance		
	<ul style="list-style-type: none"> • Pluggable terminals • Cloning function using BOP-2, IOP or SD card • G120C integrated in TIA teleservice • Operating hours counter for "Drive on" and "Motor on" 	<ul style="list-style-type: none"> • Fast mechanical installation • Intuitive series commissioning • Integration in the automation environment • Simple maintenance
Leading technological functions		
	<ul style="list-style-type: none"> • Energy-efficient, encoderless vector control • Automatic flux reduction with V/f ECO • Integrated energy calculator • Safety Integrated (STO) 	<ul style="list-style-type: none"> • High control quality • Energy-efficient motor control • Energy-saving can be measured • Integrated safety functions without supplementary costs
State-of-the-art communication		
	<p>The following communication versions are available:</p> <ul style="list-style-type: none"> • PROFINET • PROFIBUS DP • CANopen • USS/Modbus RTU 	<ul style="list-style-type: none"> • Uses all of the common bus systems • Can be flexibly used • Reliable communication • Can be simply inserted

Selection and ordering data

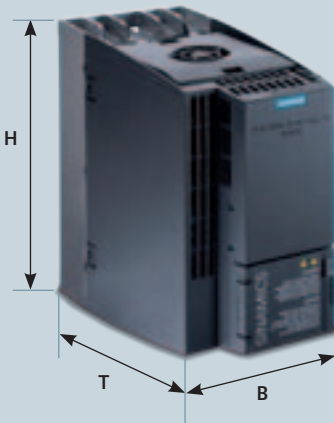

Rated data				Order Number	Frame size	Dimensions		
P _{LO*} kW	P _{LO*} Hp	I _{LO*_out} A	I _{HO**_out} A			B	H	T
3-phase supply voltage 380–480 V						mm	mm	mm
0.55	0.75	1.7	1.3	6SL3210-1KE11-8	FS A	73	195	200
0.75	1.0	2.2	1.7	6SL3210-1KE12-3				
1.1	1.5	3.1	2.2	6SL3210-1KE13-2				
1.5	2.0	4.1	3.1	6SL3210-1KE14-3				
2.2	3.0	5.6	4.1	6SL3210-1KE15-8				
3	4.0	7.3	5.6	6SL3210-1KE17-5				
4	5.0	8.8	7.3	6SL3210-1KE18-8	FS B	100		
5.5	7.5	12.5	8.8	6SL3210-1KE21-3				
7.5	10.0	16.5	12.5	6SL3210-1KE21-7	FS C	140	295	
11	15.0	25.0	16.5	6SL3210-1KE22-6				
15	20.0	31.0	25.0	6SL3210-1KE23-2				
18.5	24.0	37.0	31.0	6SL3210-1KE23-8				

EMC filter

Integrated EMC Class A/C2 filter **A**
 Unfiltered version **U**

Integrated communication interface

RS485 with USS/Modbus RTU **B 0**
 SUB-D mit PROFIBUS DP **P 0**
 SUB-D with CANopen **C 0**
 PROFINET can be ordered from June 2012 **F 1**

*LO = Low Overload
 **HO = High Overload

Technical data	
Voltage/frequency	3-phase 380–480 V –20 % +10 % with 50/60 Hz +/-5 %
Power range	0.55–18.5 kW/0.7–24 Hp
Overload power	For I _{HO_out} : 2.0 x I _{HO_out} for 3 s and then 1.5 x I _{HO_out} for 57 s in a 300 s cycle For I _{LO_out} : 1.5 x I _{LO_out} for 3 s and then 1.1 x I _{LO_out} for 57 s in a 300 s cycle
Degree of protection	IP20/UL open type
Ambient temperature	0° to 40 °C without derating/up to 60 °C with derating
EMV	Acc. to IEC 61800-3, Category 2 (FS A,B) or Category 3 (FSC) with internal EMC filter
Motor cable lengths	50 m shielded/100 m unshielded
Standards	CE, UL
Signal inputs/outputs	6 digital inputs; 2 digital outputs; 1 analog input; 1 analog output
Safety technology	SIL 2 acc. EN 61508, PL d acc. EN ISO 13849, class 3 acc. EN 60204
Control modes	Vector, V/f, V/f ECO
Energy functions	Energy-saving calculator, energy consumption calculator, automatic flux reduction
Function	Fixed velocity/speed setpoint, 2/3 wire control, PID controller, motor holding brake control
Braking	Integrated braking chopper

Options

Braking resistor		
FS A	0.55–1.5 kW	6SL3201-0BE14-3AA0
FS A	2.2–4 kW	6SL3201-0BE21-0AA0
FS B	5.5–7.5 kW	6SL3201-0BE21-8AA0
FS C	11–18.5 kW	6SL3201-0BE23-8AA0
Input reactor		
FS A	0.55–1.1 kW	6SL3203-0CE13-2AA0
FS A	1.5–4 kW	6SL3203-0CE21-0AA0
FS B	5.5–7.5 kW	6SL3203-0CE21-8AA0
FS C	11–18.5 kW	6SL3203-0CE23-8AA0
Operator panels		
BOP-2	Basic Operator Panel	6SL3255-0AA00-4CA1
IOP	Intelligent Operator Panel	6SL3255-0AA00-4JA0

Contact person:

Siemens AG
 Industry Sector
 Motion Control Systems
 P.O. Box 3180
 91050 ERLANGEN
 GERMANY

Subject to change without prior notice
 03/12
 Order No.: E80001-A360-P210-V2-7600
 DISPO 21500
 SCHÖ/40124 GD.MC.GM.SIPR.52.2.05 SB
 03122.0
 Printed in Germany
 © Siemens AG 2012

The information provided in this brochure contains merely general descriptions or characteristics of performance which in actual case of use do not always apply as described or which may change as a result of further development of the products. An obligation to provide the respective characteristics shall only exist if expressly agreed in the terms of contract. All product designations may be trademarks or product names of Siemens AG or supplier companies whose use by third parties for their own purposes could violate the rights of the owners.